



6MP Full Color/Dual-light Turret IP Camera

Model: IP-2362F28B

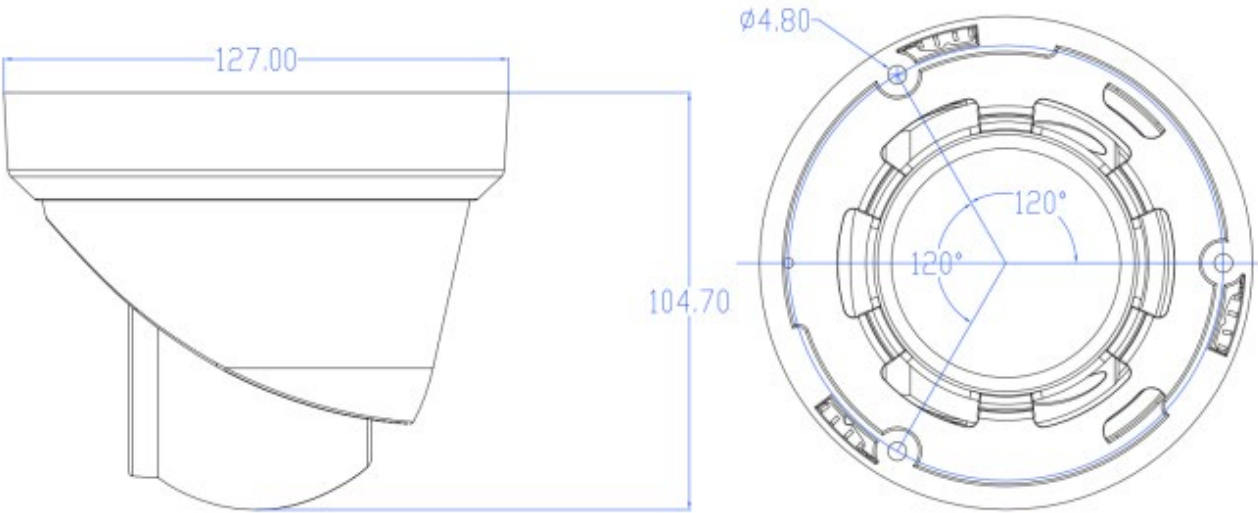

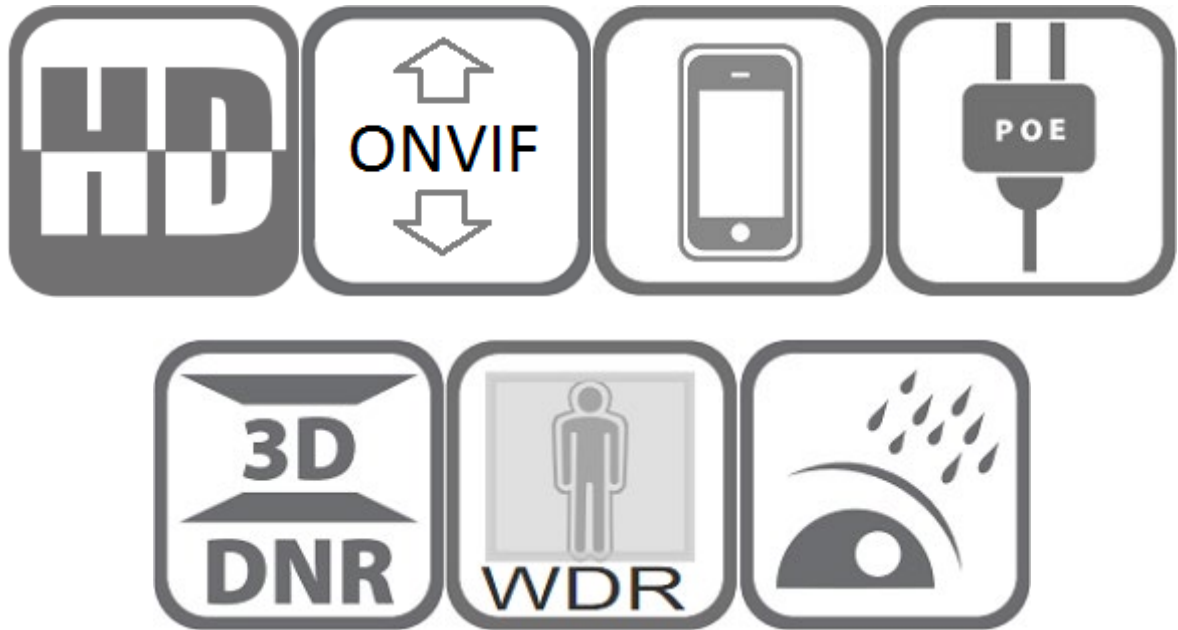

---

### Features:

- ❖ 1/3" CMOS sensor
- ❖ 6MP realtime resolution 3072x2048
- ❖ Low illumination 0.01Lux
- ❖ Day/Night, AWB/MWB, BLC, HLC, 2D/3D-DNR, Shutter, IR-CUT
- ❖ D-WDR, Mirror, rotate, Defogging
- ❖ Multiply Style OSD Overlay, Motion Detection, Privacy Mask
- ❖ RTSP and ONVIF 17.06 compatible with many third-party NVR
- ❖ H.264/H.265 dual-stream media server
- ❖ Easy-to-use P2P Cloud service
- ❖ Support user authentication, video data encryption
- ❖ Support Alarm Snapshot to Email and FTP
- ❖ Multiply WEB browser IE, Firefox 32bit ESR, PC Client, Mobile APP remote access
- ❖ RJ45 100mbps network port, IEEE802.3af PoE
- ❖ Lightning protection 4000V
- ❖ Strong water-proof housing, IP66
- ❖ 2 pcs warm light & IR LEDs dual light, distance 20-30 meters
- ❖ HD 2.8mm F1.6 lens
- ❖ [Vehicle & human body detection](#)
- ❖ [Built-in Microphone](#)

## Technical Specifications:

|                                            |                                                                                                                                               |
|--------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------|
| Model                                      | IP-2362F28B                                                                                                                                   |
| <b>Camera</b>                              |                                                                                                                                               |
| Image Sensor                               | 1/3" CMOS                                                                                                                                     |
| Effective Pixels                           | 6 megapixels                                                                                                                                  |
| Electronic Shutter                         | AUTO, 10-10000/min                                                                                                                            |
| Min. Illumination                          | 0.01Lux@F1.2(AGC ON), 0Lux IR on                                                                                                              |
| Day/Night                                  | Auto/Color/(B/W)/Timing                                                                                                                       |
| WDR                                        | Digital WDR                                                                                                                                   |
| White Balance                              | Auto/Manual                                                                                                                                   |
| BLC /HLC                                   | Support                                                                                                                                       |
| DNR                                        | 2D/3D DNR                                                                                                                                     |
| Other                                      | AGC, Motion Detection, Privacy Mask, Flip, OSD Overlay                                                                                        |
| <b>Encode</b>                              |                                                                                                                                               |
| Video Standard                             | H.264/H.265                                                                                                                                   |
| Video Resolution                           | Main Stream:<br>25fps@6MP(3072x2048)/25fps@5MP(2592x1944)/4MP(2592x1520)/3MP<br>, 30fps@1080P/720P<br>Sub stream: 25fps@D1/VGA/360P/CIF, etc. |
| Video Bitrates                             | 512Kbps - 12Mbps, VBR/CBR                                                                                                                     |
| Audio Standard                             | G.711-u/G.711-a                                                                                                                               |
| Built-in Mic                               | Yes                                                                                                                                           |
| OSD Overlay                                | Title and Time overlay                                                                                                                        |
| <b>LEDs</b>                                |                                                                                                                                               |
| LEDs                                       | 2 pcs warm light & IR LEDs dual light                                                                                                         |
| Distance                                   | 20-30M                                                                                                                                        |
| <b>Lens</b>                                |                                                                                                                                               |
| Focal length                               | 2.8mm F1.6 lens                                                                                                                               |
| <b>Optional Function</b>                   |                                                                                                                                               |
| PoE, Audio, Vehicle & Human body detection |                                                                                                                                               |
| <b>Network Services</b>                    |                                                                                                                                               |
| Protocol                                   | HTTP/RTSP/FTP/SMTP/DHCP/NTP/NFS, etc.                                                                                                         |
| P2P                                        | Yes                                                                                                                                           |
| Web                                        | IE, Firefox (32bit esr), etc.                                                                                                                 |
| Media                                      | CMS, Android, IOS                                                                                                                             |
| ONVIF                                      | 17.06 compatible                                                                                                                              |
| <b>General</b>                             |                                                                                                                                               |
| Network Port                               | 1-RJ45, 100Mbps, POE optional                                                                                                                 |
| Power Supply                               | Default: PoE (12V DC $\pm$ 10% optional)                                                                                                      |
| Power Consumption                          | < 8 W                                                                                                                                         |
| Operating Temp.                            | -30°C-(+60)°C, 10%-90%RH                                                                                                                      |