


Model: IP-2388F28B

4K 8MP ColorVu IP Metal Turret Camera with Built-in Mic

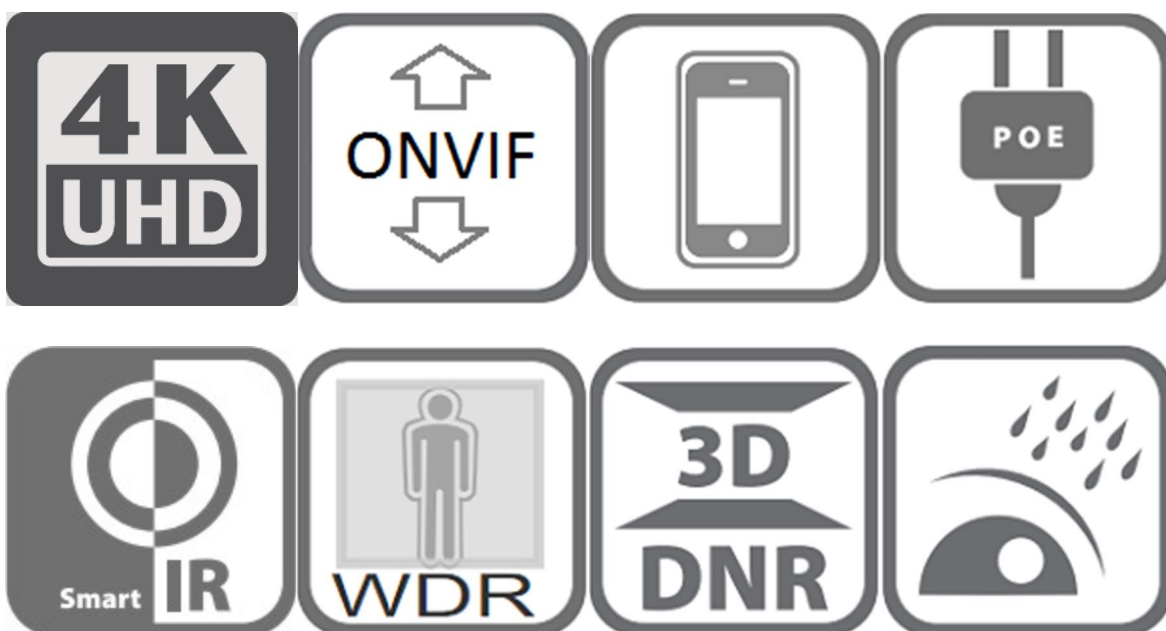

Features:

- ❖ Fully Plug & Play with Hikvision, CTVision and Unv NVR
- ❖ H.265 / H.264 video encoding
- ❖ Up to 8 megapixels resolution (3840x2160)
- ❖ Up to 18fps@8MP (3840x2160), 30fps@5MP (2592x1944)
- ❖ Built-in 2.8mm/F1.2 wide angle fixed board lens
- ❖ 3000K warm white LED, illumination distance 25M
- ❖ 24/7 full time color video
- ❖ Ultra-low illumination 0.05Lux, Day/Night (ICR), AWB, IR-CUT
- ❖ D-WDR, Motion Detection, Privacy Mask, Mirror, Flip
- ❖ Built-in Power-over-Ethernet (PoE) interfaces
- ❖ RTSP and Onvif 17.06 compatible
- ❖ Easy-to-use P2P Cloud service
- ❖ Multi web browser, PC Client, mobile APP remote access
- ❖ Turret camera, outdoor weather-proof IP66 grade
- ❖ Built-in mic for audio recording
- ❖ Junction box optional

Accessories:



DB-97B
Junction Box



LB-97B
Wallmount Bracket

Technical Specifications:

Model	IP-2388F28B
Image Sensor	1/2.8" 8MP Sony IMX415 CMOS
Effective Pixels	3840 (H) × 2160 (V) approx. 8.0M pixels
Electronic Shutter	AUTO, AUTO, 1/25s ~ 1/100000s
Min. Illumination	0.05Lux@F1.2(AGC ON), 0Lux IR on
Day/Night	Auto/Color/(B/W)/Timing
WDR	Digital WDR
White Balance	Auto/Manual
AGC/BLC	Support
DNR	2D/3D DNR
Built-in Mic	Yes
Other functions	Motion Detection, Privacy Mask, Flip, Mirror
Encode	
Video Standard	H.264/H.265
Video Resolution	18fps@8MP(3840×2160), 30fps@5MP(2592×1944)/4MP/3MP/1080P/720P
Video Bitrate	11 Kbps ~ 10 Mbps
Audio Standard	G.711-u
Illumination	
LED Spotlight	3000K Warm White LED x2
Illumination Distance	25 meters
Lens	
Fixed focal lens	2.8mm / F1.2 board lens
Network Services	
Protocol	RTSP/DHCP/NTP/DST/FTP/SMTP
P2P	Yes
Web	IE , Firefox, etc.
Media	CMS, Android, IOS
ONVIF	17.06 compatible
General	
Network port	1-RJ45, 100Mbps, PoE

Power Supply	12 VDC $\pm$ 10% or PoE
Water proof	IP-66 water resistant standard
Power Consumption	< 8.5 W
Operating Temp.	-30°C-(+60)°C, 10%-90%RH